


HIGH CAPACITY LFP123A CELL DATA



DIMENSIONS:

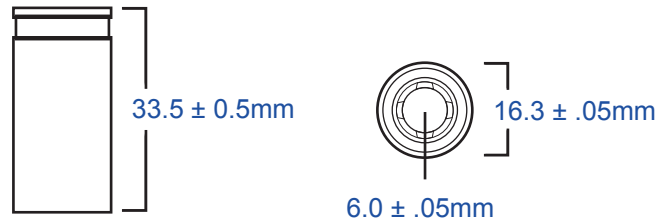

SPECIFICATIONS:

Nominal Capacity @ C/5 (mAh)	600
Nominal Voltage @ C/5 (V)	3.2
Weight (g)	17 ± 2

RECOMMENDED OPERATING CONDITIONS:

Continuous Discharge (mA)	≤ 300
Charge Voltage Cutoff (V)	3.65
Charge (mA)	≤ 300
Discharge Voltage Cutoff (V)	2.50
High Operating Temp (°C)	60
Low Operating Temp (°C)	-20


MAXIMUM OPERATING CONDITIONS:

Continuous Discharge (mA)	1,200
Charge (mA)	600
Charge Voltage Cutoff (V)	4.2
Discharge Voltage Cutoff (V)	2.0

Performance may vary depending on application. All specifications and operation conditions are subject to change without notice. This data is for evaluation purposes only. No guarantee is intended or implied by this data. Rev. SP-600021 / A

K2 Energy Solutions, Inc.
 1125 American Pacific Drive, Suite C
 Henderson, NV 89074
 702.478.3590 • www.K2battery.com

LFP123A Discharge Curves at Different Rates

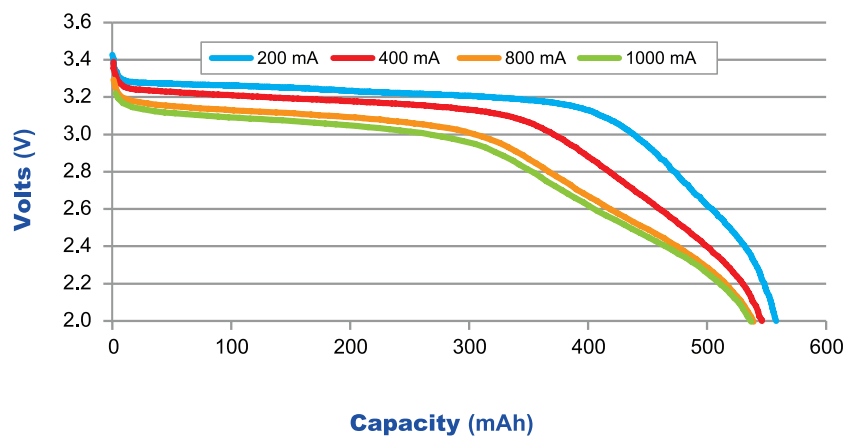

LFP123A Life Cycle Data @ 23°C

