


CELL CHARACTERISTICS

Capacity	Typical	2050 mAh
		7.4 Wh
	Minimum	2000 mAh
		7.2 Wh
Cell Voltage	Nominal	3.6 V
	Charge	4.2 V
	Discharge	2.0 V
Charge Current	Standard	2.0 A
	Maximum	6.0 A
Charge Time	Standard	1.5 hr
Discharge Current	Continuous	20 A
Temperature	Charge	0°C to 45°C
	Discharge	-40°C to 60°C
Energy Density	Volumetric	425 Wh/l
	Gravimetric	160 Wh/kg
Internal Impedance	AC(1 KHz)	13 mΩ
	DC (10A/1s)	20 mΩ

PHYSICAL CHARACTERISTICS

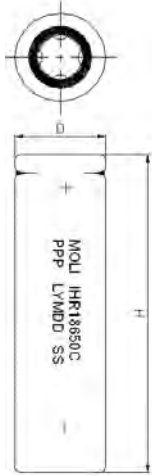

Shape	Cylindrical
Can	Steel
Diameter	18.6 mm (Max)
Height	65.2 mm (Max)
Weight	44.5 g (Typical)

The information contained herein is for reference only and does not imply a performance guarantee or a product warranty. Specifications and characteristics are subject to change without prior notice.

For application specific information, please contact E-One Moli Energy Sales and Applications or the nearest MOLICEL® recognized agent.

Version 80073.6.19.13-1.0


Taiwan Facility
 10 Dali 2nd Rd., Shan-Hwa,
 Tainan County, Taiwan, R.O.C.
 Tel: 886-6-505-0666
 Fax: 886-6-505-0777
mailto:molicel@molicel.com
<http://www.molicel.com>

Canada Facility
 20 000 Stewart Crescent
 Maple Ridge, BC, Canada, V2X 9E7
 Tel: 1-604-466-6654
 Fax: 1-604-466-6600
mailto:molicel@molicel.com
<http://www.molicel.com>


Headquarters
 10F, 113, Sec.2, Zhong Shan N Rd.,
 Taipei, Taiwan, R.O.C.
 Tel: 886-2-2567-3500
 Fax: 886-2-2567-6500

Agency:


Charge Characteristics

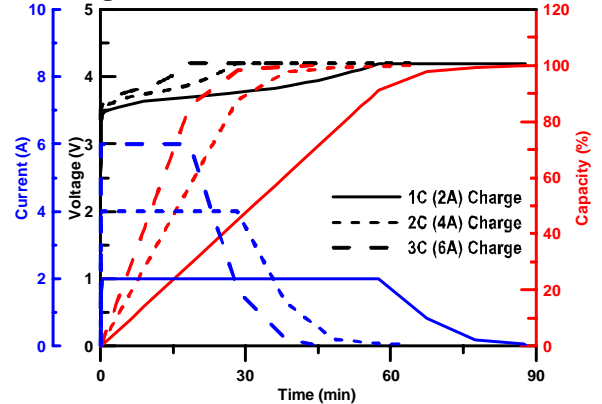

Discharge Rate Characteristics

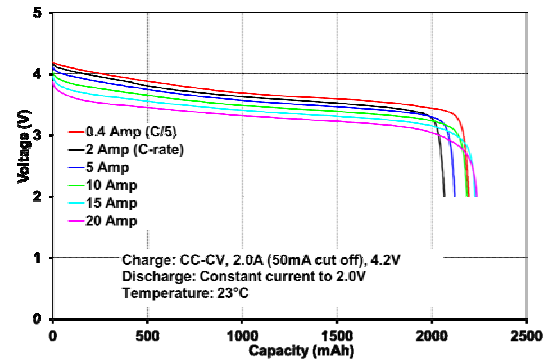

Discharge Temperature Characteristics

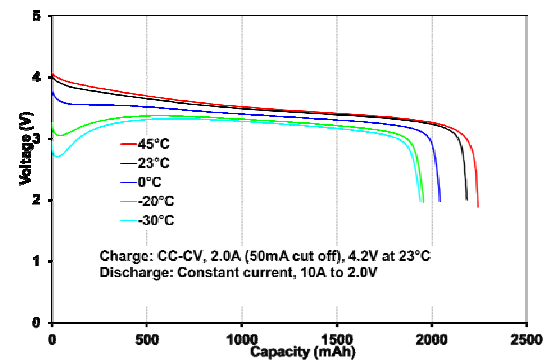

Cycle Characteristics

